



SMART-BITE

The drilling tip that changes the world

Granted, the shape of the new eccentric drilling tip of WT-T fastening system is completely new and unusual. It is responsible that the unloved krkgh-noise at your work in timber construction belongs to the past. So the new WT-T is faster, more precisely and with a minimized splitting tendency. Thanks to the new tip shape it bites into the wood effortlessly – that is why we call the new WT-T the self-tapping screw with the SMART-BITE tip.

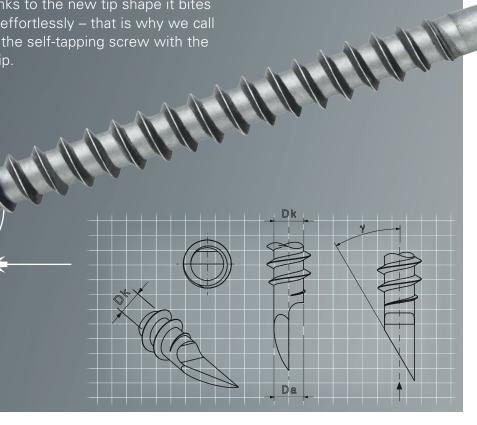

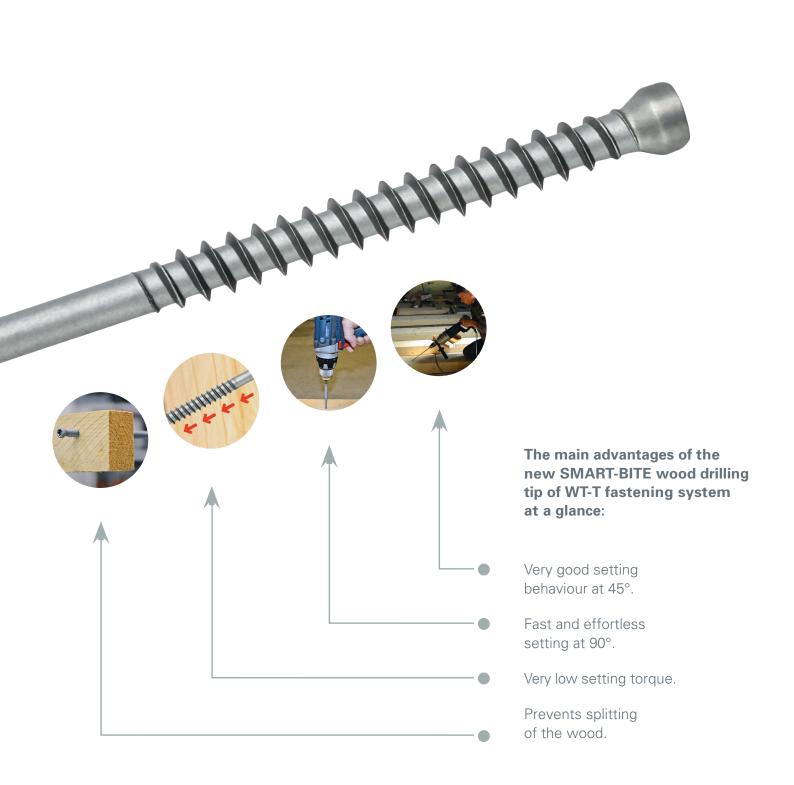

Ideal solution

Fasteners r	ange WT-T-6,5 x L							
Type	Material	Diameter	Length [mm]	S _g	S _{clamp} [mm]	d_k	Bit	
WT	Т	6,5 x	65	28	28	8,0	T30	
WT	Т	6,5 x	90	40	40	8,0	T30	
WT	Т	6,5 x	130	55	55	8,0	T30	
WT	Т	6,5 x	160	65	65	8,0	T30	
WT	Т	6,5 x	190	80	80	8,0	T30	
WT	Т	6,5 x	220	95	95	8,0	T30	
Fasteners r	ange WT-T-8,2 x L							
Type	Material	Diameter	Length [mm]	S _g [mm]	S _{clamp} [mm]	d_k	Bit	
WT	Т	8,2 x	160	65	65	10,0	T40	
WT	Т	8,2 x	190	80	80	10,0	T40	
WT	Т	8,2 x	220	95	95	10,0	T40	
WT	Т	8,2 x	245	107	107	10,0	T40	

Material: carbon steel surface: Durocoat®

Т

Т

Т

8,2 x

8.2 x

8.2 x

275


300

330

WT

WT

WT



122

135

135

122

135

135

SFS intec AG Division Construction Rosenbergsaustrasse 10 CH-9435 Heerbrugg T +41 71 727 50 66 F +41 71 727 56 99 construction@sfsintec.biz www.sfsintec.biz



T40

T40

T40

10,0

10.0

10,0

All calculations have to be checked and approved by the responsible planner ahead of execution. The user is responsible to assure

© SFS intec, i-TW 905473, 08-20 WT_Smart-Bite_en_CH_Hgg_1.01 Technical changes reserved